

**RoHS Compliant**  
**TX-1490/RX-1310 nm Single-mode Bi-directional (10km)**  
**SFP LC Simplex Connector, with Diagnostic Monitoring**  
**IEEE 802.3ah 1000BASE-BX10-D**



### Features

- RoHS Compliant
- Compliant with IEEE802.3ah 1000BASE-BX10-D Standard
- Compliant with SFF8472 Digital Diagnostic Standard
- Industry standard small form pluggable (SFP) package
- Hot Pluggable
- Class 1 laser product complies with EN 60825-1

### Ordering Information

PART NUMBER	TX/RX	TEMPERATURE	LD Type	Distance
GB4931-SFP-LC.S10	1490/1310	0°C to 70 °C	1490 DFB	10km
GB4931-SFP-LC.S10(WT)	1490/1310	-40°C to 85 °C	1490 DFB	10km

### Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-40 to 95	± 3	°C	External
Voltage	3.0 to 3.6	± 0.1	V	
Bias Current	0 to 100	± 10%	mA	
TX Power	-12 to 0	± 3 dB	dBm	
RX Power	-21 to -3	± 3 dB	dBm	

**RoHS Compliant**  
**TX-1490/RX-1310 nm Single-mode Bi-directional (10km)**  
**SFP LC Simplex Connector, with Diagnostic Monitoring**  
**IEEE 802.3ah 1000BASE-BX10-D**

---

### Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Storage Temperature	$T_S$	-40	85	°C	
Supply Voltage	$V_{CC}$	-0.5	4.0	V	
Input Voltage	$V_{IN}$	-0.5	$V_{CC}$	V	

### Recommended Operating Conditions

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Case Operating Temperature	$T_C$	$\frac{0}{-40}$	$\frac{70}{85}$	°C	
Supply Voltage	$V_{CC}$	3.1	3.5	V	
Supply Current	$I_{TX} + I_{RX}$	---	300	mA	
Relative Humidity(Non-condensing)	$RH$	5	95	%	

**RoHS Compliant**  
**TX-1490/RX-1310 nm Single-mode Bi-directional (10km)**  
**SFP LC Simplex Connector, with Diagnostic Monitoring**  
**IEEE 802.3ah 1000BASE-BX10-D**

### Transmitter Electro-optical Characteristics

$V_{CC} = 3.1\text{ V to }3.5\text{ V}$ ,  $T_C = 0\text{ }^\circ\text{C to }70\text{ }^\circ\text{C}$  ( $-40\text{ }^\circ\text{C to }85\text{ }^\circ\text{C}$ )


PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Output Optical Power 9/125 $\mu\text{m}$ fiber	$P_{out}$	-9	---	-3	dBm	Average
Extinction Ratio	$ER$	6	---	---	dB	
Center Wavelength	$\lambda_C$	1480	---	1500	nm	
Spectral Width (-20dB)	$\Delta\lambda$			0.88	nm	
Rise/Fall Time, (20–80%)	$T_{r,f}$	---	---	260	ps	
Relative Intensity Noise	$RIN$	---	---	-120	dB/Hz	
Total Jitter	$TJ$	---	---	227	ps	
Output Eye				Compliant with IEEE802.3z		
Max. $P_{out}$ TX-DISABLE Asserted	$P_{OFF}$	---	---	-45	dBm	
Differential Input Voltage	$V_{DIFF}$	0.4	---	2.0	V	
Transmit Fault Output-Low	$TX\_FAULT_L$	0.0	---	0.5	V	
Transmit Fault Output-High	$TX\_FAULT_H$	2.4	---	$V_{CC}$	V	
Time to initialize, include reset of TX_FAULT	$t_{init}$	---	---	300	ms	
TX_FAULT from fault to assertion	$t_{fault}$	---	---	100	$\mu\text{s}$	
TX_DISABLE time to start reset	$t_{reset}$	10	---	---	$\mu\text{s}$	

### Receiver Electro-optical Characteristics

$V_{CC} = 3.1\text{ V to }3.5\text{ V}$ ,  $T_C = 0^\circ\text{C to }70^\circ\text{C}$  ( $-40^\circ\text{C to }85^\circ\text{C}$ )

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Optical Input Power-maximum	$P_{IN}$	-3	---	---	dBm	PRBS7, BER < $10^{-12}$
RX Sensitivity	$P_{IN}$	---	---	-21	dBm	PRBS7, BER < $10^{-12}$
RX Sensitivity as OMA				-19.7	dBm	PRBS7, BER < $10^{-12}$
Operating Center Wavelength	$\lambda_C$	1260	---	1360	nm	
Optical Return Loss	$ORL$	14	---	---	dB	$\lambda=1260\sim1360\text{nm}$
Optical isolation	$ISO$	---	---	-45	dB	$\lambda=1480\sim1500\text{nm}$
LOS Deasserted	$P_D$	---	---	-21	dBm	
LOS Asserted	$P_A$	-35	---	---	dBm	
Differential Output Voltage	$V_{DIFF}$	0.5	---	1.2	V	
Data Output Rise, Fall Time (20–80%)	$T_{r,f}$	---	---	0.35	ns	
Receiver Loss of Signal Output Voltage-Low	$RX\_LOS_L$	0	---	0.5	V	
Receiver Loss of Signal Output Voltage-High	$RX\_LOS_H$	2.4	---	$V_{CC}$	V	

## Dimensions

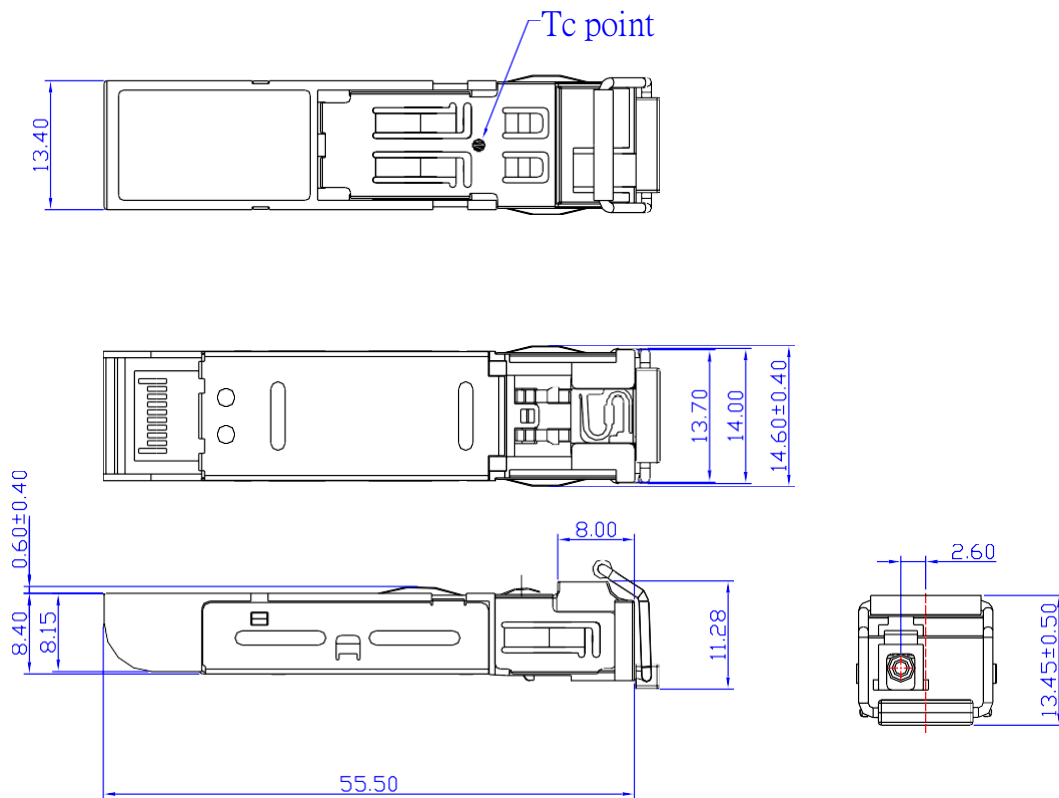



**DIMENSIONS ARE IN MILLIMETERS**

**ALL DIMENSIONS ARE 0.2mm UNLESS OTHERWISE SPECIFIED**

±

**RoHS Compliant**  
**TX-1490/RX-1310 nm Single-mode Bi-directional (10km)**  
**SFP LC Simplex Connector, with Diagnostic Monitoring**  
**IEEE 802.3ah 1000BASE-BX10-D**

**SFP host board mechanical layout**

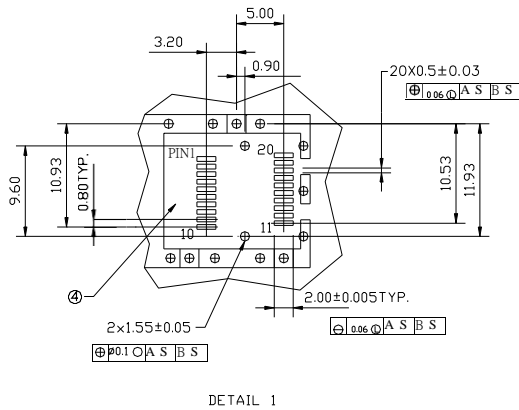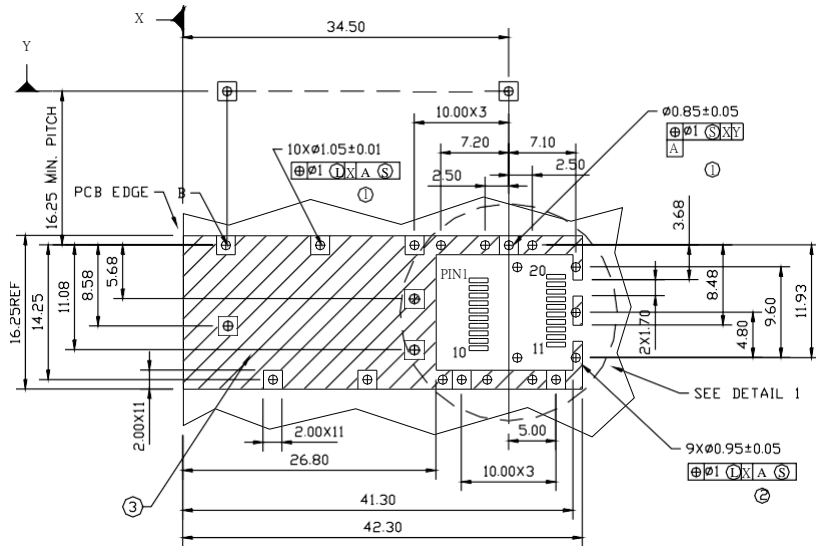

**LEGEND**


1. PADS AND VIAS ARE CHASSIS GROUND
2. THROUGH HOLES, PLATING OPTIONAL
3. HATCHED AREA DENOTES COMPONENT AND TRACE KEEPOUT (EXCEPT CHASSIS GROUND)
4. AREA DENOTES COMPONENT KEEPOUT (TRACES ALLOWED)

DIMENSIONS ARE IN MILLIMETERS

Unit: mm


**RoHS Compliant**  
**TX-1490/RX-1310 nm Single-mode Bi-directional (10km)**  
**SFP LC Simplex Connector, with Diagnostic Monitoring**  
**IEEE 802.3ah 1000BASE-BX10-D**

**Assembly drawing**

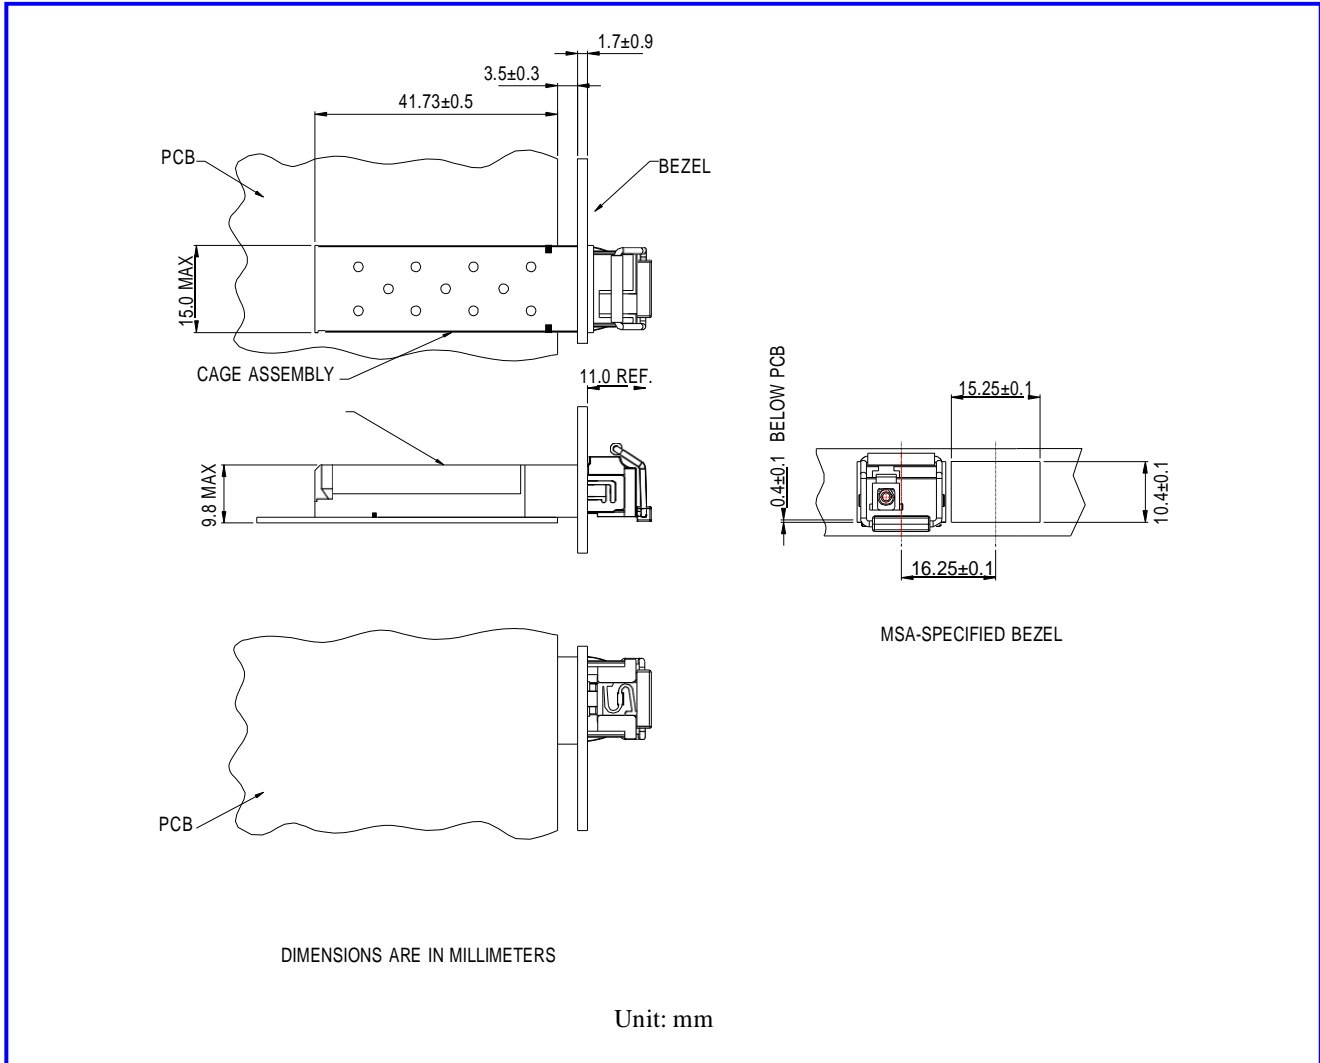

## Pin Assignment

Pin-Out

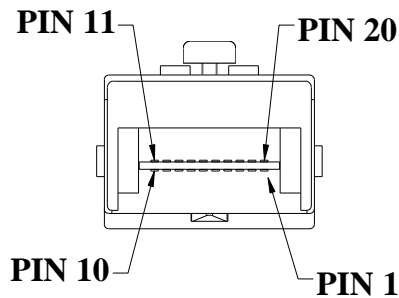

Pin	Signal Name	Description
1	$T_{GND}$	Transmit Ground
2	$TX\_FAULT$	Transmit Fault
3	$TX\_DISABLE$	Transmit Disable
4	$MOD\_DEF (2)$	SDA Serial Data Signal
5	$MOD\_DEF (1)$	SCL Serial Clock Signal
6	$MOD\_DEF (0)$	TTL Low
7	$RATE\_SELECT$	Open Circuit
8	$RX\_LOS$	Receiver Loss of Signal, TTL High, open collector
9	$R_{GND}$	Receiver Ground
10	$R_{GND}$	Receiver Ground
11	$R_{GND}$	Receiver Ground
12	$RX-$	Receive Data Bar, Differential , ac coupled
13	$RX+$	Receive Data, Differential , ac coupled
14	$R_{GND}$	Receiver Ground
15	$V_{CCR}$	Receiver Power Supply
16	$V_{CCT}$	Transmitter Power Supply
17	$T_{GND}$	Transmitter Ground
18	$TX+$	Transmit Data, Differential , ac coupled
19	$TX-$	Transmit Data Bar, Differential , ac coupled
20	$T_{GND}$	Transmitter Ground

Note : All information contained in this document is subject to change without notice.