

## DQxx-SFP-LC.S10 series

**SFP28 Single-Mode for DWDM Application**


**Duplex SFP28 Transceiver, With DDM and Dual CDR**

**Digital Diagnostic Function**

**RoHS Compliant**

### Features

- ◆ Operating data rate support 24.33Gbps /25.78Gbps
- ◆ Available in all C-Band Wavelengths on the 100GHz DWDM ITU Grid
- ◆ Temperature-Stabilized DWDM EML Transmitter
- ◆ Duplex LC Connector
- ◆ Power Dissipation < 2W
- ◆ With CDR function
- ◆ Dispersion tolerance from -200ps/nm to 200ps/nm (10km)
- ◆ Hot-Pluggable
- ◆ Compliant with SFF-8402
- ◆ Operating Case Temperature:  
Standard: 0°C~+70°C  
  
Industrial: -40~+85°C
- ◆ Safety Certification: TUV/UL/FDA\*<sup>Note1</sup>
- ◆ RoHS Compliant\*<sup>Note1</sup>

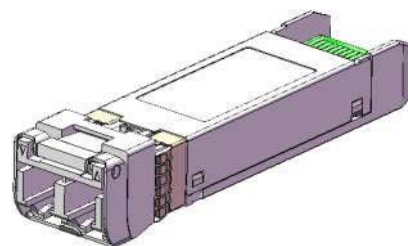

### Applications

- ◆ CPRI Option 10
- ◆ 25GbE
- ◆ Other Optical Link

### Ordering Information

Part No.	Data Rate	Laser	Power budget	CDR	Case Temp.
DQxx-SFP-LC.S10* <sup>Note2</sup>	25.78Gbps	DWDM EML	13dB	YES	0°C to +70°C
DQxx-SFP-LC.S10(WT)* <sup>Note2</sup>	25.78Gbps	DWDM EML	13dB	YES	-40°C to +85°C

Note1: For the latest certification information, please check with Data Controls Inc.

Note2: XX refers to DWDM Wavelength channel as ITU-T specified, please refer the following table for detailed center wavelength information.

\*The product image is only for reference purpose.

**XX- Channel refers to the following table:**

<b>Channel (XX)*Note3</b>	<b>Part NO.</b>	<b>Frequency (THz)</b>	<b>Center Wavelength (nm)</b>
15	DQ15-SFP-LC.S10 DQ15-SFP-LC.S10(WT)	191.5	1565.50
16	DQ16-SFP-LC.S10 DQ16-SFP-LC.S10(WT)	191.6	1564.68
17	DQ17-SFP-LC.S10 DQ17-SFP-LC.S10(WT)	191.7	1563.86
18	DQ18-SFP-LC.S10 DQ18-SFP-LC.S10(WT)	191.8	1563.05
19	DQ19-SFP-LC.S10 DQ19-SFP-LC.S10(WT)	191.9	1562.23
20	DQ20-SFP-LC.S10 DQ20-SFP-LC.S10(WT)	192.0	1561.42
21	DQ21-SFP-LC.S10 DQ21-SFP-LC.S10(WT)	192.1	1560.61
22	DQ22-SFP-LC.S10 DQ22-SFP-LC.S10(WT)	192.2	1559.79
23	DQ23-SFP-LC.S10 DQ23-SFP-LC.S10(WT)	192.3	1558.98
24	DQ24-SFP-LC.S10 DQ24-SFP-LC.S10(WT)	192.4	1558.17
25	DQ25-SFP-LC.S10 DQ25-SFP-LC.S10(WT)	192.5	1557.36
26	DQ26-SFP-LC.S10 DQ26-SFP-LC.S10(WT)	192.6	1556.55
27	DQ27-SFP-LC.S10 DQ27-SFP-LC.S10(WT)	192.7	1555.75
28	DQ28-SFP-LC.S10 DQ28-SFP-LC.S10(WT)	192.8	1554.94
29	DQ29-SFP-LC.S10 DQ29-SFP-LC.S10(WT)	192.9	1554.13
30	DQ30-SFP-LC.S10 DQ30-SFP-LC.S10(WT)	193.0	1553.33
31	DQ31-SFP-LC.S10 DQ31-SFP-LC.S10(WT)	193.1	1552.52
32	DQ32-SFP-LC.S10 DQ32-SFP-LC.S10(WT)	193.2	1551.72
33	DQ33-SFP-LC.S10 DQ33-SFP-LC.S10(WT)	193.3	1550.92

34	DQ34-SFP-LC.S10 DQ34-SFP-LC.S10(WT)	193.4	1550.12
35	DQ35-SFP-LC.S10 DQ35-SFP-LC.S10(WT)	193.5	1549.32
36	DQ36-SFP-LC.S10 DQ36-SFP-LC.S10(WT)	193.6	1548.51
37	DQ37-SFP-LC.S10 DQ37-SFP-LC.S10(WT)	193.7	1547.72
38	DQ38-SFP-LC.S10 DQ38-SFP-LC.S10(WT)	193.8	1546.92
39	DQ39-SFP-LC.S10 DQ39-SFP-LC.S10(WT)	193.9	1546.12
40	DQ40-SFP-LC.S10 DQ40-SFP-LC.S10(WT)	194.0	1545.32
41	DQ41-SFP-LC.S10 DQ41-SFP-LC.S10(WT)	194.1	1544.53
42	DQ42-SFP-LC.S10 DQ42-SFP-LC.S10(WT)	194.2	1543.73
43	DQ43-SFP-LC.S10 DQ43-SFP-LC.S10(WT)	194.3	1542.94
44	DQ44-SFP-LC.S10 DQ44-SFP-LC.S10(WT)	194.4	1542.14
45	DQ45-SFP-LC.S10 DQ45-SFP-LC.S10(WT)	194.5	1541.35
46	DQ46-SFP-LC.S10 DQ46-SFP-LC.S10(WT)	194.6	1540.56
47	DQ47-SFP-LC.S10 DQ47-SFP-LC.S10(WT)	194.7	1539.77
48	DQ48-SFP-LC.S10 DQ48-SFP-LC.S10(WT)	194.8	1538.98
49	DQ49-SFP-LC.S10 DQ49-SFP-LC.S10(WT)	194.9	1538.19
50	DQ50-SFP-LC.S10 DQ50-SFP-LC.S10(WT)	195.0	1537.40
51	DQ51-SFP-LC.S10 DQ51-SFP-LC.S10(WT)	195.1	1536.61
52	DQ52-SFP-LC.S10 DQ52-SFP-LC.S10(WT)	195.2	1535.82
53	DQ53-SFP-LC.S10 DQ53-SFP-LC.S10(WT)	195.3	1535.04
54	DQ54-SFP-LC.S10 DQ54-SFP-LC.S10(WT)	195.4	1534.25

55	DQ55-SFP-LC.S10 DQ55-SFP-LC.S10(WT)	195.5	1533.47
56	DQ56-SFP-LC.S10 DQ56-SFP-LC.S10(WT)	195.6	1532.68
57	DQ57-SFP-LC.S10 DQ57-SFP-LC.S10(WT)	195.7	1531.90
58	DQ58-SFP-LC.S10 DQ58-SFP-LC.S10(WT)	195.8	1531.12
59	DQ59-SFP-LC.S10 DQ59-SFP-LC.S10(WT)	195.9	1530.33
60	DQ60-SFP-LC.S10 DQ60-SFP-LC.S10(WT)	196.0	1529.55
61	DQ61-SFP-LC.S10 DQ61-SFP-LC.S10(WT)	196.1	1528.77

\*Note3: Please contact with Data Controls Inc. for the channel availability.

## Product Description

The DQxx-SFP-LC.S10 series single mode transceiver is SFP28 module for duplex optical data communications support 25.78Gb/s. This module is designed for single mode fiber and operates at a nominal DWDM wavelength from 1528nm to 1566nm as specified by ITU-T.

It is with the SFP+ 20-pin connector to allow hot plug capability. The transmitter section uses a DWDM EML laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header.

The DQxx-SFP-LC.S10 series is designed to be compliant with SFP28 Multi-Source Agreement (MSA) Specification SFF-8402.

## Absolute Maximum Ratings\*<sup>Note4</sup>

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T <sub>s</sub>	-40	+85	°C
Supply Voltage	V <sub>cc</sub>	-0.5	3.6	V
Operating Relative Humidity	RH	5	85	%

Note4: Exceeding any one of these values may destroy the device immediately.

## Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T <sub>c</sub>	Standard	0	+70	°C
		Industrial	-40	+85	°C
Power Supply Voltage	V <sub>cc</sub>	3.15	3.3	3.45	V
Power Supply Current	I <sub>cc</sub>			606	mA

**Performance Specifications – Electrical**

Parameter		Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter							
CML Inputs(Differential)		Vin	40		1000	mVpp	AC coupled input*Note5
Input Impedance (Differential)		Zin		100		ohm	Rin > 100 kohm @ DC
TX_Dis	Disable		2		Vcc+0.3	V	
	Enable		0		0.8		
TX_FAULT	Fault		2.4		Vcc+0.3	V	
	Normal		0		0.4		
Receiver							
CML Outputs (Differential)		Vout	450		1050	mVpp	AC coupled output*(Note5)
Output Impedance (Differential)		Zout	85	100	115	ohm	
RX_LOS	LOS		2.4		Vcc+0.3	V	
	Normal		0		0.4	V	

**Performance Specifications – Optical**



Parameter		Symbol	Min.	Typical	Max.	Unit
<b>Transmitter</b>						
Center Wavelength Spacing				100		GHz
				0.8		nm
Side Mode Suppression Ratio		SMSR	30			dB
Average Output Power@25.78Gb/s* <sup>Note6</sup>		P <sub>out</sub>	-1		+4	dBm
Extinction Ratio		ER	6			dB
<b>Receiver</b>						
Receiver Sensitivity@25.78Gb/s* <sup>Note7</sup>		P <sub>min</sub>			-14	dBm
Receiver Overload* <sup>Note8</sup>		P <sub>max</sub>	2			dBm
LOS De-Assert		LOSD			-17	dBm
LOS Assert		LOSA	-30			dBm
LOS Hysteresis		H <sub>y</sub>	0.5			dB
Optical Signal To Noise Ratio Tolerance		OSNR	33			dB

Note5: CML logic, internally AC coupled.

Note6: Output is coupled into a 9/125μm single-mode fiber.

Note7: Minimum average optical power measured at the BER less than 5E-5. The measure pattern is PRBS 2<sup>31</sup>-1.

Note8: It's suggested to using a >3dB attenuator between Transmitter and Receiver if testing Tx to Rx directly.

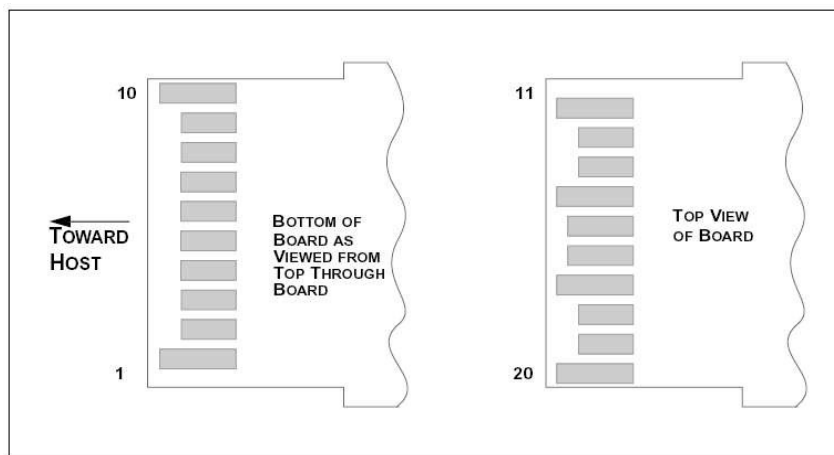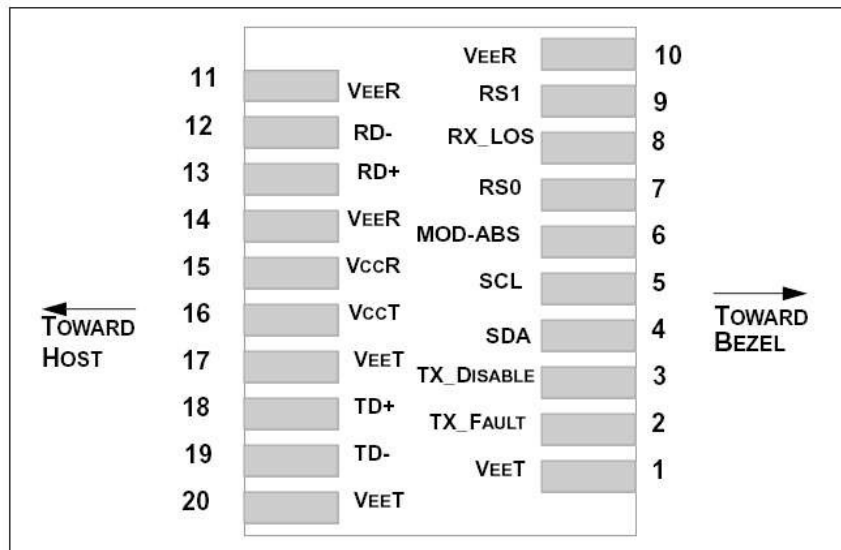**SFP28 Transceiver Electrical Pad Layout**

**Pin Function Definition**

Pin Num.	Name	FUNCTION	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	Note 5
2	TX_Fault	Transmitter Fault Indication	3	Note 1
3	TX Disable	Transmitter Disable	3	Note 2, Module disables on high or open
4	SDA	Module Definition 2	3	Note 3, Data line for Serial ID.
5	SCL	Module Definition 1	3	Note 3, Clock line for Serial ID.
6	MOD-ABS	Module Definition 0	3	Note 3

7	RS0	RX Rate Select (LVTTTL).	3	This pin has an internal 47k pull down to ground. RS0=1 sets Rx CDR enable, while RS0=0 sets Rx CDR bypass.
8	RX_LOS	Loss of Signal	3	Note 4
9	RS1	TX Rate Select (LVTTTL).	1	This pin has an internal 47k pull down to ground. RS1=1 sets Tx CDR enable, while RS1=0 sets Tx CDR bypass.
10	VeeR	Receiver Ground	1	Note 5
11	VeeR	Receiver Ground	1	Note 5
12	RD-	Inv. Received Data Out	3	Note 6
13	RD+	Received Data Out	3	Note 7
14	VeeR	Receiver Ground	1	Note 5
15	VccR	Receiver Power	2	3.3 ± 5%, Note 7
16	VccT	Transmitter Power	2	3.3 ± 5%, Note 7
17	VeeT	Transmitter Ground	1	Note 5
18	TD+	Transmit Data In	3	Note 8
19	TD-	Inv. Transmit Data In	3	Note 8
20	VeeT	Transmitter Ground	1	Note 5

#### Notes:

1) TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. Pull up voltage between 2.4V and VccT/R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.4V.

2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7K~10 K Ω resistor. Its states are:

Low (-0.3 – 0.8V): Transmitter on

(>0.8, < 2.0V): Undefined

High (2.0 – VccT/R+0.3V): Transmitter Disabled

Open: Transmitter Disabled

3) Module Absent, connected to VeeT or VeeR in the module.

4) RX\_LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor. Pull up voltage between 2.4V and VccT/R+0.3V. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by

the standard in use). Low indicates normal operation. In the low state, the output will be pulled to  $< 0.4V$ .

5) VeeR and VeeT may be internally connected within the SFP28 module.


6) RD-/+: These are the differential receiver outputs. They are AC coupled  $100\Omega$  differential lines which should be terminated with  $100\Omega$  (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 225 mV-525mV single-ended when properly terminated.

7) VccR and VccT are the receiver and transmitter power supplies. They are defined as  $3.3V \pm 5\%$  at the SFP+ connector pin. Maximum supply current is 606mA. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP28 input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP28 transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP28 transceiver module.

8) TD-/+: These are the differential transmitter inputs. They are AC-coupled, differential lines with  $100\Omega$  differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept swings of 20mV-500mV single-ended, though it is recommended that values between 90mV-900mV single-ended be used for best EMI performance.



## Mechanical Specifications

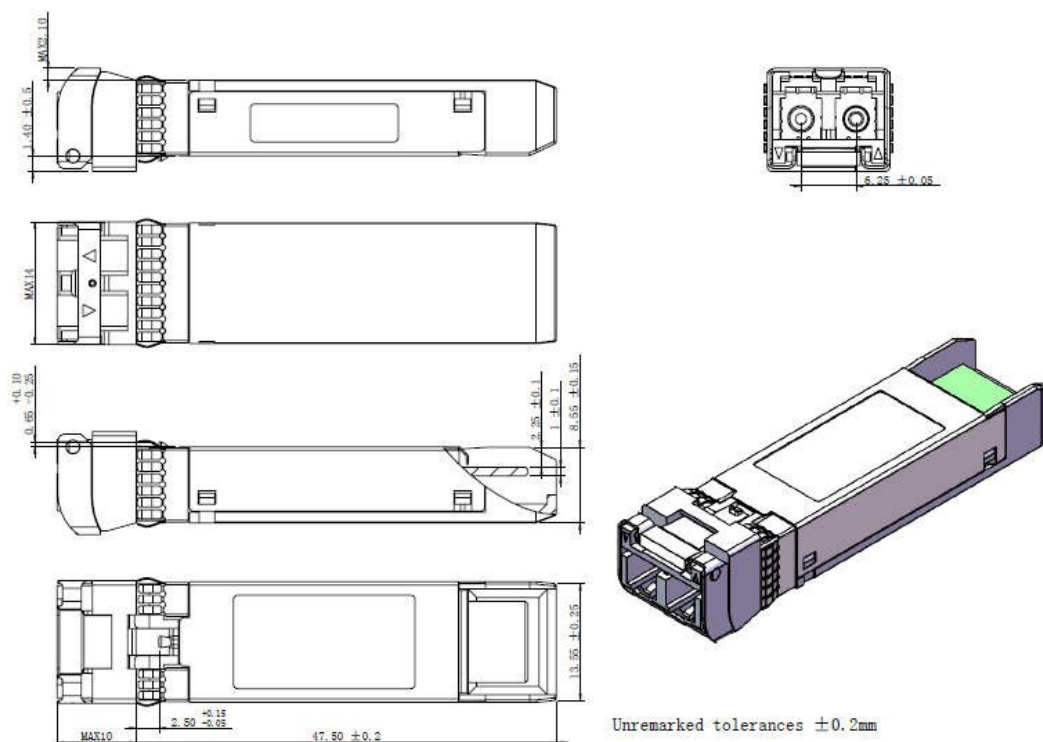

\*This 2D drawing is only for reference, please check with Data Controls before ordering.

## Eye Safety

This single-mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

**Obtaining Document**

You can visit our website: <https://dci.jp>

Or contact Data Controls Inc., Ltd. Listed at the end of the documentation to get the latest documents.

**Notice:**

Data Controls Inc. reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. Data Controls Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Contact:**

Data Controls Inc.

E-mail:sales@dci.jp

<https://dci.jp>