

JB1270-XFP-LC.S40

Tx: 1270nm/Rx: 1330nm BIDI XFP Transceiver for 10GbE/10FC
RoHS 6 Compliant

Features

- ◆ Supports 9.95Gb/s to 11.3Gb/s data rates
- ◆ Power budget 16dB at least
- ◆ 1270nm DFB Transmitter/ 1330nm Receiver
- ◆ LC Connector
- ◆ +3.3V power supply only
- ◆ Power dissipation <2W
- ◆ Built-in digital diagnostic functions
- ◆ Case temperature range:
Standard: 0~+70°C
- ◆ Complaint with XFP MSA
- ◆ Complaint with IEEE 802.3ae 10GBASE-ER/EW
- ◆ Complaint with 10GFC 1200-SM-LL-L



Applications

- ◆ 10GBASE-ER 10G Ethernet at 10.3125Gbps
- ◆ 10GBASE-EW 10G Ethernet at 9.953Gbps
- ◆ 1200-SM-LL-L 10G Fiber Channel at 10.51875Gbps

Ordering information

| Part No. | Data Rate | Laser | Temp. | Power budget | Optical Interface | DDMI |
|---|----------------|------------|----------|--------------|-------------------|------|
| JB1270-XFP-LC.S40* <small>Note1</small> | Up to 11.3Gbps | 1270nm DFB | Standard | 16dB | LC | YES |

Note1: Standard version.

Regulatory Compliance*^{Note2}

| Product Certificate | Certificate Number | Applicable Standard |
|---------------------|--------------------|----------------------------|
| TUV | R50135086 | EN 60950-1:2006+A11+A1+A12 |
| | | EN 60825-1:2007 |
| | | EN 60825-2:2004+A1+A2 |
| UL | E317337 | UL 60950-1 |
| | | CSA C22.2 No. 60950-1-07 |
| EMC CE | AE 50285865 0001 | EN 55022:2010 |
| | | EN 55024:2010 |
| CB | JPTUV-049251 | IEC 60825-1 |
| | | IEC 60950-1 |
| FCC | WTF14F0514437E | 47 CFR PART 15 OCT., 2013 |
| FDA | 1331340-000 | CDRH 1040.10 |
| ROHS | RHS01G006464 | 2011/65/EU |

Note2: The above certificate number updated to June 2014, because some certificate will be updated every year, such as FCC, FDA and ROHS. For the latest certification information, please check with Data Controls Inc.

Product Description

The JB1270-XFP-LC.S40 single mode transceiver is small form factor pluggable module for duplex optical data communications such as 10GBASE-ER/EW defined by IEEE 802.3ae and 10G Fiber Channel 1200-SM-LL-L. It is with the XFP 30-pin connector to allow hot plug capability.

The JB1270-XFP-LC.S40 module is designed for single mode fiber and operates at a nominal wavelength of 1270nm. The transmitter section uses a multiple quantum well DFB, which is class 1 laser compliant according to International Safety Standard IEC-60825.

The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

Absolute Maximum Ratings*^{Note3}

| Parameter | Symbol | Min | Max | Unit |
|------------------------|-----------------|------|-----|------|
| Maximum Supply Voltage | V _{cc} | -0.5 | 4.0 | V |
| Storage Temperature | T _s | -40 | 85 | °C |

*Note3: Exceeding any one of these values may destroy the device permanently.

Recommend operating condition

| Parameter | Symbol | Min | Typ | Max | Units |
|----------------------------|-----------------|------|-----|------|-------|
| Case Operating Temperature | T _c | 0 | - | 70 | °C |
| Power Supply Current | I _{cc} | - | - | 580 | mA |
| Supply Voltage | V _{cc} | 3.13 | - | 3.45 | V |

Electrical Characteristics

| Parameter | Symbol | Min | Typ | Max | Unit |
|--|------------------------|------|-----|-----------------|------|
| Transmitter | | | | | |
| Data Rate | | 9.95 | - | 11.3 | Gbps |
| Input differential impedance | R _{in} | 90 | 100 | 110 | Ω |
| Differential data input swing* ^{Note4} | V _{in,pp} | 120 | - | 820 | mV |
| Transmit Disable Voltage | V _D | 2.0 | - | V _{cc} | V |
| Transmit Enable Voltage | V _{EN} | GND | - | GND+ 0.8 | V |
| Transmit Disable Assert Time | | - | - | 10 | us |
| Receiver | | | | | |
| Differential data output swing* ^{Note4} | V _{out,pp} | 340 | 650 | 850 | mV |
| Output Differential Impedance | P _{IN} | 90 | 100 | 110 | Ω |
| Data output rise time* ^{Note5} | t _r | - | - | 38 | ps |
| Data output fall time* ^{Note5} | t _f | - | - | 38 | ps |
| LOS Fault | V _{LOS fault} | 2.4 | - | V _{cc} | V |
| LOS Normal | V _{LOS norm} | GND | - | GND+0.5 | V |

*Note4. Internal AC coupling.

*Note5. 20 – 80 %.

Optical Characteristics

| Parameter | Symbol | Min. | Typical | Max. | Unit |
|--|-----------------------|------|---------|------|-------|
| Power budget | | 16 | | | dB |
| Data Rate | | 9.95 | - | 11.3 | Gbps |
| Transmitter | | | | | |
| Centre Wavelength | λ _c | 1260 | 1270 | 1280 | nm |
| Spectral Width (-20dB) | Δλ | | | 1 | nm |
| Side Mode Suppression Ratio | SMSR | 30 | | | dB |
| Average Output Power* ^{note6} | P _{out, AVG} | 1 | | 5 | dBm |
| Extinction Ratio | ER | 3.5 | | | dB |
| Average Power of OFF Transmitter | | | | -30 | dBm |
| Relative Intensity Noise | RIN | | | -128 | dB/Hz |
| TX Disable Assert Time | t _{off} | | | 10 | us |
| Receiver | | | | | |
| Centre Wavelength | λ _c | 1320 | | 1340 | nm |
| Sensitivity* ^{note7} | P _{IN} | | | -15 | dBm |
| Receiver Overload | P _{MAX} | 0.5 | | | dBm |

| | | | | | |
|---------------|------------------|-----|--|-----|-----|
| LOS De-Assert | LOS _D | | | -17 | dBm |
| LOS Assert | LOS _A | -29 | | | dBm |

*Note6. Output is coupled into a 9/125um SMF.

*Note7: Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps.

Pin Descriptions

| Pin | Logic | Symbol | Name/Description | Ref. |
|-----|-----------|-------------------------------|--|------|
| 1 | | GND | Module Ground | 1 |
| 2 | | VEE5 | Optional -5.2 Power Supply – Not required | |
| 3 | LVTTL-I | Mod-Desel | Module De-select; When held low allows the module to , respond to 2-wire serial interface commands | |
| 4 | LVTTL-O | $\overline{\text{Interrupt}}$ | Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface | 2 |
| 5 | LVTTL-I | TX_DIS | Transmitter Disable; Transmitter laser source turned off | |
| 6 | | VCC5 | +5 Power Supply, Not required | |
| 7 | | GND | Module Ground | 1 |
| 8 | | VCC3 | +3.3V Power Supply | |
| 9 | | VCC3 | +3.3V Power Supply | |
| 10 | LVTTL-I | SCL | Serial 2-wire interface clock line | 2 |
| 11 | LVTTL-I/O | SDA | Serial 2-wire interface data line | 2 |
| 12 | LVTTL-O | Mod_Abs | Module Absent; Indicates module is not present. Grounded in the module. | 2 |
| 13 | LVTTL-O | Mod_NR | Module Not Ready; | 2 |
| 14 | LVTTL-O | RX_LOS | Receiver Loss of Signal indicator | 2 |
| 15 | | GND | Module Ground | 1 |
| 16 | | GND | Module Ground | 1 |
| 17 | CML-O | RD- | Receiver inverted data output | |
| 18 | CML-O | RD+ | Receiver non-inverted data output | |
| 19 | | GND | Module Ground | 1 |
| 20 | | VCC2 | +1.8V Power Supply – Not required | |
| 21 | LVTTL-I | P_Down/RST | Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset | |
| | | | Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle. | |
| 22 | | VCC2 | +1.8V Power Supply – Not required | |
| 23 | | GND | Module Ground | 1 |
| 24 | PECL-I | RefCLK+ | Reference Clock non-inverted input, AC coupled on the host board – Not required | 3 |

| | | | | |
|----|--------|---------|---|---|
| 25 | PECL-I | RefCLK- | Reference Clock inverted input, AC coupled on the host board – Not required | 3 |
| 26 | | GND | Module Ground | 1 |
| 27 | | GND | Module Ground | 1 |
| 28 | CML-I | TD- | Transmitter inverted data input | |
| 29 | CML-I | TD+ | Transmitter non-inverted data input | |
| 30 | | GND | Module Ground | 1 |

Notes:

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
3. A Reference Clock input is not required.

Pin Arrangement

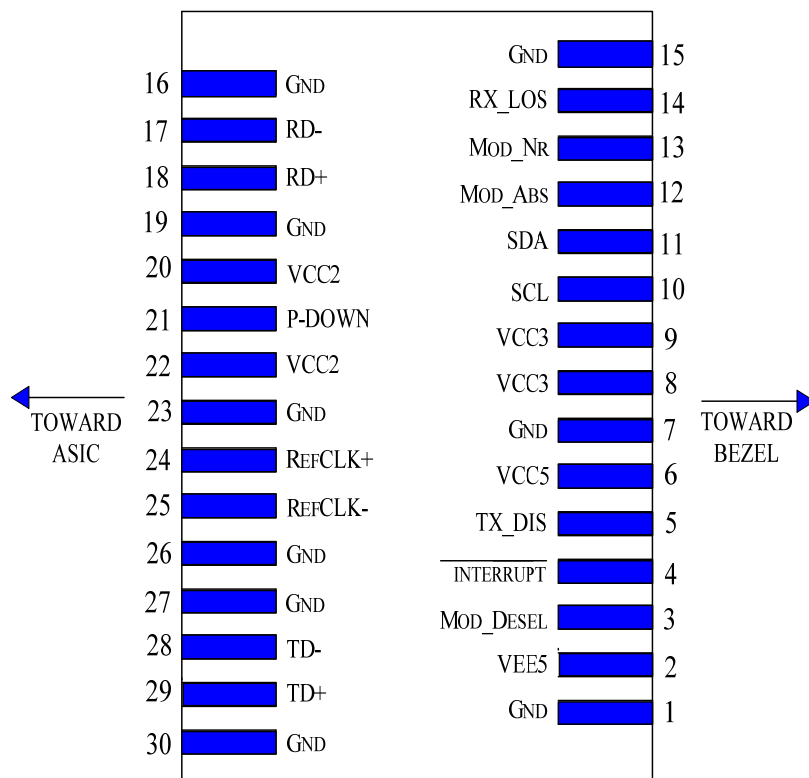


Diagram of Host Board Connector Block Pin Numbers and Name


Digital Diagnostic Functions

JB1270-XFP-LC.S40 Small Form Factor 10Gb/s (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification Rev 4.5.

As defined by the XFP MSA, Data Controls Inc XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- ◆ Transceiver temperature
- ◆ Laser bias current
- ◆ Transmitted optical power
- ◆ Received optical power
- ◆ Transceiver supply voltage


The structure of the memory map is shown in the following figure, which is accessible over a 2-wire serial interface at the 8-bit address 1010000X (A0h). The normal 256 byte I²C address space is divided into low and upper blocks of 128 Bytes. The lower block of 128 Bytes is always directly available and is used for the diagnostics and control function. Multiple blocks of memories are available in the upper 128 Bytes of the address space. These are individually addressed through a table select Byte which the user enters into a location in the lower address space. Thus, there is a total available address space of 128*256 = 32 Kbytes in this upper memory space. The contents of Table 01h are listed in following table. Please refer SFF INF-8077i (Revision 4.5) for detailed information.

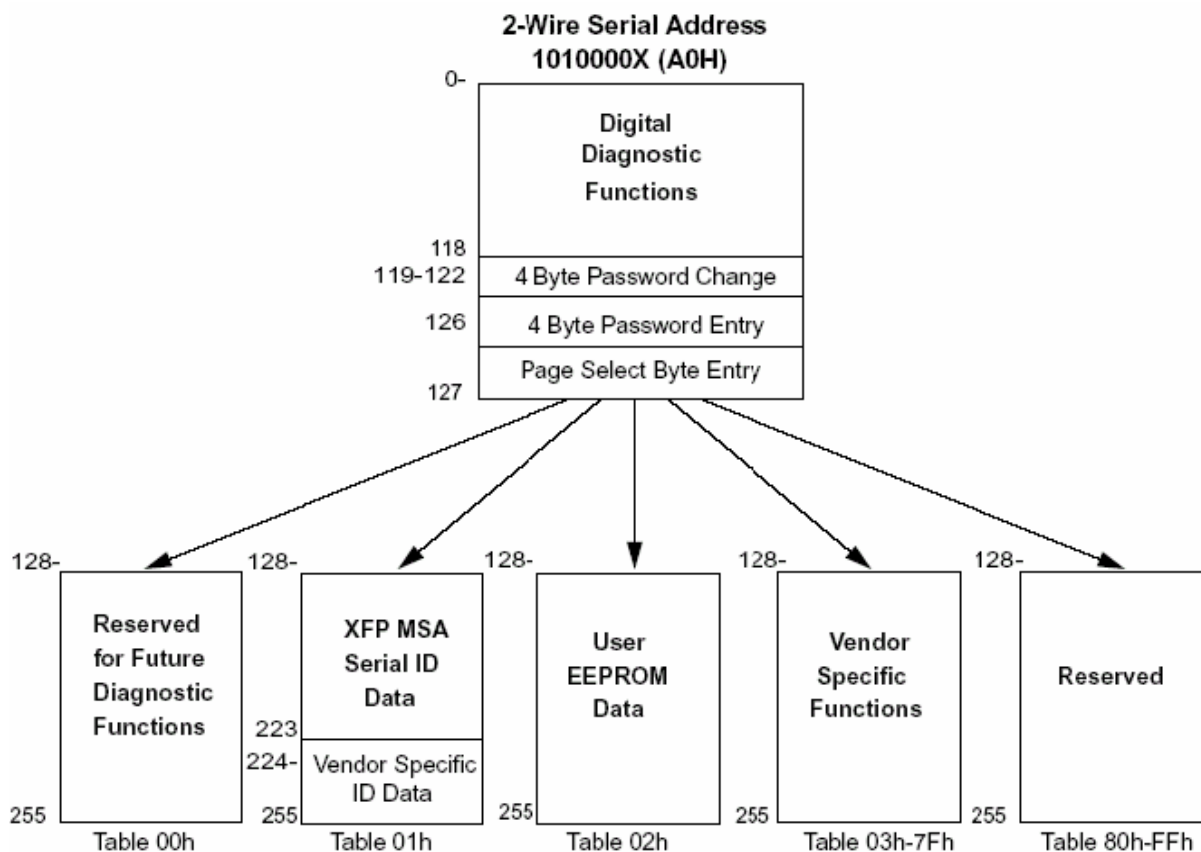


Monitor Specification:

| Data Address | Parameter | Accuracy |
|--------------|-------------|----------|
| 96 ~ 97 | Temperature | ± 3°C |
| 98 ~ 99 | Reserved | |
| 100~101 | Tx Bias | ±10% |
| 102~103 | Tx Power | ±2dB |
| 104~105 | Rx Power | ± 2dB |
| 106~107 | VCC3 | ± 3% |

Recommended Host Board Power Supply Circuit

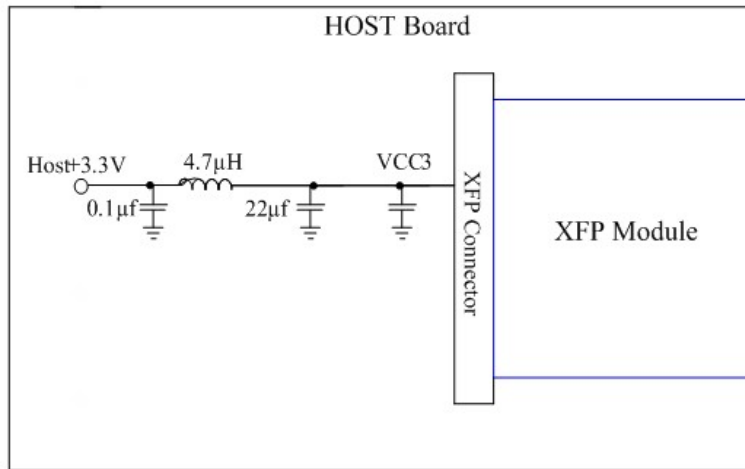


Recommended High-speed Interface Circuit

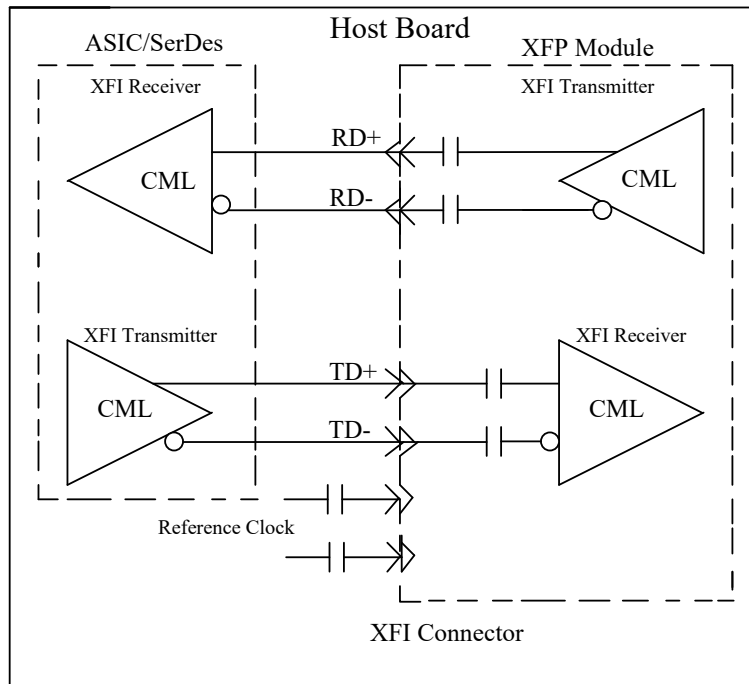

Mechanical Specifications

Data Controls Inc's XFP transceivers are compliant with the dimensions defined by the XFP Multi-Sourcing Agreement (MSA).

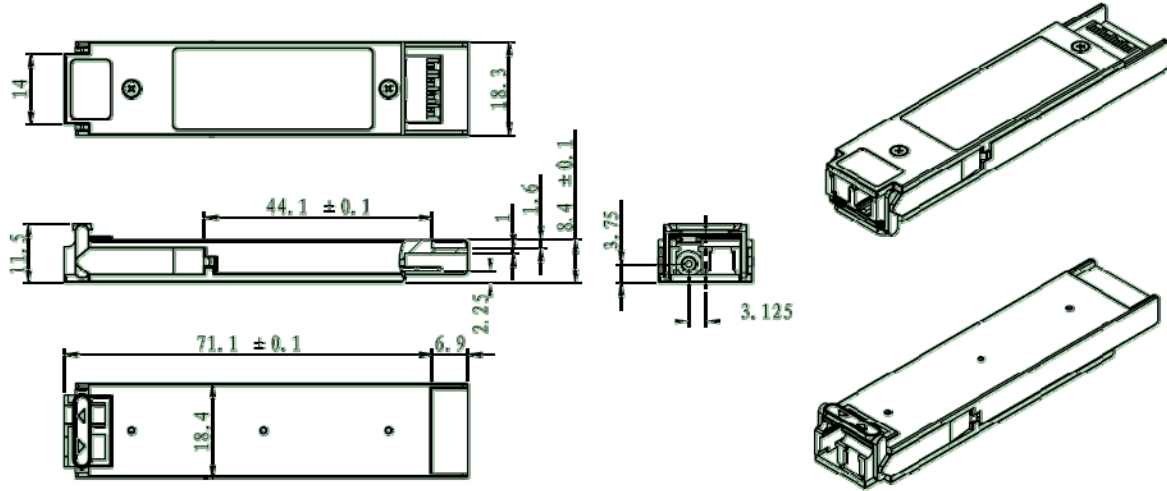

Eye Safety

This single-mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Data Controls Inc.

E-mail: info@dcj.jp

<http://www.dci.jp>