

JB1270-XFP-LC.S60

Tx: 1270nm/Rx: 1330nm BIDI XFP Transceiver for 10GbE/10FC
RoHS 6 Compliant

Features

- ◆ Supports 9.95Gb/s to 10.5Gb/s data rates
- ◆ Power budget 21dB at least
- ◆ 1270nm DFB Transmitter/ 1330nm Receiver
- ◆ LC Connector
- ◆ +3.3V power supply only
- ◆ Power dissipation <2W
- ◆ Built-in digital diagnostic functions
- ◆ Case temperature range:
Standard: 0~+70°C
- ◆ Complaint with XFP MSA



Applications

- ◆ 10G Ethernet at 10.3125Gbps
- ◆ 10G Ethernet at 9.953Gbps
- ◆ 1200-SM-LL-L 10G Fiber Channel at 10.51875Gbps

Ordering information

Part No.	Data Rate	Laser	Temp.	Power Budget	Optical Interface	DDMI
JB1270-XFP-LC.S60	10.5Gbps	1270nm DFB	Standard	21dB	LC	YES

Regulatory Compliance

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883G Method 3015.7	Class 1C (>1000 V)
Electrostatic Discharge to the enclosure	EN 55024:1998+A1+A2 IEC-61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022:2006 CISPR 22B :2006 VCCI Class B	Compatible with standards Noise frequency range: 30 MHz to 6 GHz. Good system EMI design practice required to achieve Class B margins. System margins are dependent on customer host board and chassis design.
Immunity	EN 55024:1998+A1+A2 IEC 61000-4-3	Compatible with standards. 1kHz sine-wave, 80% AM, from 80 MHz to 1 GHz. No effect on transmitter/receiver performance is detectable between these limits.
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN (IEC) 60825-1:2007 EN (IEC) 60825-2:2004+A1	CDRH compliant and Class I laser product. TüV Certificate No. 50135086
Component Recognition	UL and CUL EN60950-1:2006	UL file E317337 TüV Certificate No. 50135086 (CB scheme)
RoHS6	2002/95/EC 4.1&4.2 2005/747/EC 5&7&13	Compliant with standards

In light of item 5 in RoHS exemption list of RoHS Directive 2002/95/EC, Item 5: Lead in glass of cathode ray tubes, electronic components and fluorescent tubes.

In light of item 13 in RoHS exemption list of RoHS Directive 2005/747/EC, Item13: Lead and cadmium in optical and filter glass. The three exemptions are being concerned for our transceivers, because our transceivers use glass, which may contain Pb, for components such as lenses, windows, isolators, and other electronic components.

Product Description

JB1270-XFP-LC.S60 single mode transceiver is small form factor pluggable module for Bi-direction optical data communications such as 10 Gigabit Ethernet and 1200-SM-LL-L 10G Fiber Channel. It is with the XFP 30-pin connector to allow hot plug capability.

JB1270-XFP-LC.S60 module is designed for single mode fiber and operates at a nominal wavelength of 1270nm.

The transmitter section uses a multiple quantum well DFB, which is class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated avalanche photodiode detector mounted in an optical header and a limiting post-amplifier IC.

Absolute Maximum Ratings* ^{Note1}

Parameter	Symbol	Min	Max	Unit
Maximum Supply Voltage	V _{cc}	-0.5	4.0	V
Storage Temperature	T _s	-40	85	°C

*Note1: Exceeding any one of these values may destroy the device permanently.

Recommend operating condition

Parameter	Symbol	Min	Typ	Max	Units
Case Operating Temperature	T _c	0	-	70	°C
Power Supply Current	I _{cc}	-	-	580	mA
Supply Voltage	V _{cc}	3.13	-	3.45	V

Electrical Characteristics

(T_c = -10 to 85°C, V_{cc} = 3.15V to 3.45V)

Parameter	Symbol	Min	Typ	Max	Unit
Transmitter					
Data Rate		9.95	-	10.52	Gbps
Input differential impedance	R _{in}	90	100	110	Ω
Differential data input swing* ^{Note2}	V _{in,pp}	120	-	820	mV
Transmit Disable Voltage	V _D	2.0	-	V _{cc}	V
Transmit Enable Voltage	V _{EN}	GND	-	GND+ 0.8	V
Transmit Disable Assert Time		-	-	10	us
Receiver					
Differential data output swing* ^{Note2}	V _{out,pp}	340	650	850	mV
Data output rise time* ^{Note3}	t _r	-	-	38	ps
Data output fall time* ^{Note3}	t _f	-	-	38	ps
LOS Fault	V _{LOS fault}	2.4	-	V _{cc}	V
LOS Normal	V _{LOS norm}	GND	-	GND+0.5	V

*Note2. Internal AC coupling.

*Note3. 20 – 80 %.

Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Power budget		21			dB
Data Rate			9.953/10.3125		Gbps
Transmitter					
Centre Wavelength	λ_C	1260	1270	1280	nm
Spectral Width (-20dB)	$\Delta\lambda$			1	nm
Average Output Power ^{*note4}	$P_{out, AVG}$	1		5	dBm
Extinction Ratio	ER	3.5			dB
Side Mode Suppression Ratio	SMSR	30			dB
Transmitter and Dispersion Penalty	TDP			2	dB
Average Power of OFF Transmitter				-30	dBm
Relative Intensity Noise	RIN			-128	dB/Hz
Input Differential Impedance	Z_{IN}	90	100	110	Ω
TX Disable	Disable		2.0	$V_{CC}+0.3$	V
	Enable		0	0.8	
TX Fault	Fault		2.0	$V_{CC}+0.3$	V
	Normal		0	0.8	
TX Disable Assert Time	t_{off}			10	us
Receiver					
Centre Wavelength	λ_C	1320		1340	nm
Sensitivity ^{*note5}	P_{IN}			-20	dBm
Receiver Overload	P_{MAX}	-6			dBm
Output Differential Impedance	P_{IN}	90	100	110	Ω
LOS De-Assert	LOS_D			-22	dBm
LOS Assert	LOS_A	-34			dBm
LOS	High		2.0	$V_{CC}+0.3$	V
	Low		0	0.8	

*Note4: Output is coupled into a 9/125um SMF.

*Note5: Measured with a PRBS 231-1 test pattern @10.3125Gbps.

Pin Descriptions

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Module Ground	1
2		VEE5	Optional -5.2 Power Supply – Not required	
3	LVTTL-I	Mod-Desel	Module De-select; When held low allows the module to , respond to 2-wire serial interface commands	
4	LVTTL-O	$\overline{\text{Interrupt}}$	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	

XFP BIDI Series

6		VCC5	+5 Power Supply, Not required	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTL-I	SCL	Serial 2-wire interface clock line	2
11	LVTTL-I/O	SDA	Serial 2-wire interface data line	2
12	LVTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTL-O	Mod_NR	Module Not Ready;	2
14	LVTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
21	LVTTL-I	P_Down/RESET	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset	
			Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Notes:

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
3. A Reference Clock input is not required.

Pin Arrangement

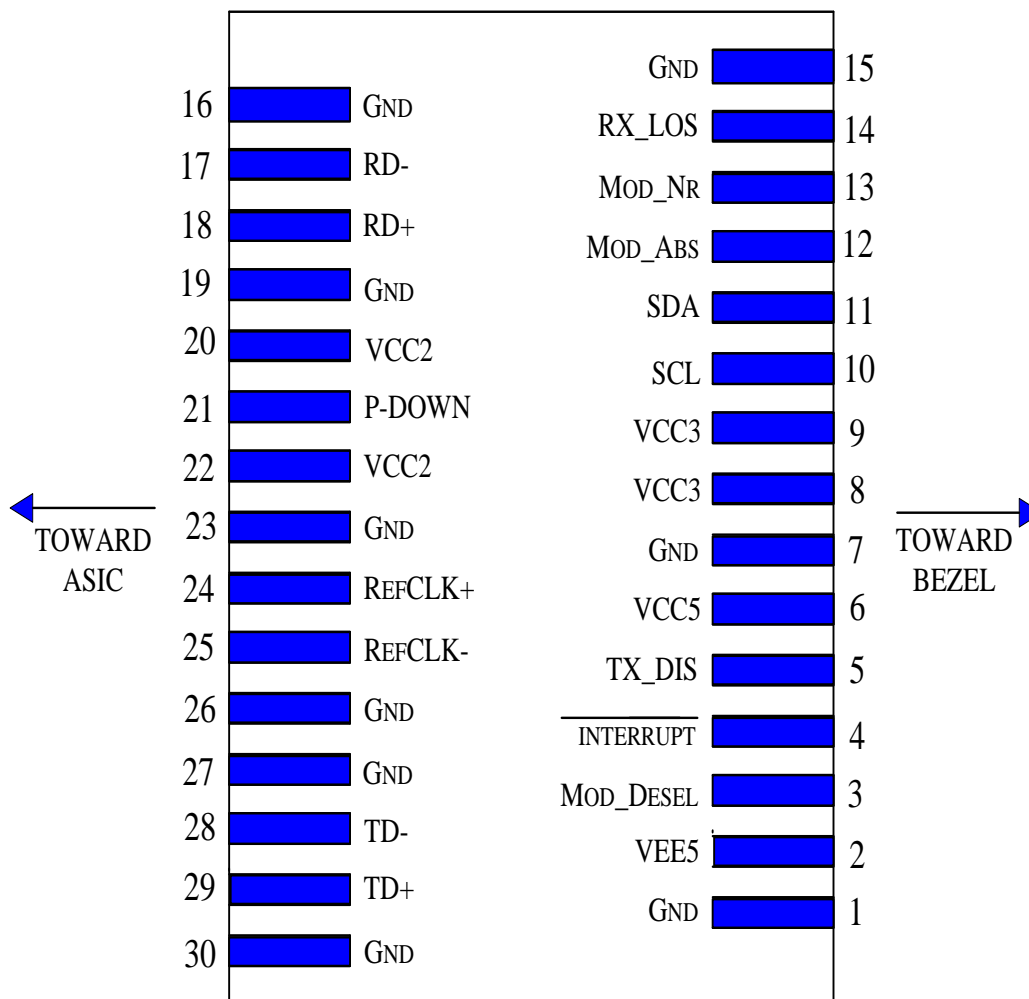


Diagram of Host Board Connector Block Pin Numbers and Name

Digital Diagnostic Functions

JB1270-XFP-LC.S60 Small Form Factor 10Gb/s (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification Rev 4.5.


As defined by the XFP MSA transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- ◆ Transceiver temperature
- ◆ □ Laser bias current
- ◆ Transmitted optical power
- ◆ Received optical power
- ◆ Transceiver supply voltage

The structure of the memory map is shown in the following figure, which is accessible over a 2-wire serial interface at the 8-bit address 1010000X (A0h). The normal 256 byte I²C address space is divided into low and upper blocks of 128 Bytes. The lower block of 128 Bytes is always directly available and is used for the diagnostics and control function. Multiple blocks of

XFP BIDI Series


memories are available in the upper 128 Bytes of the address space. These are individually addressed through a table select Byte which the user enters into a location in the lower address space. Thus, there is a total available address space of $128 \times 256 = 32$ Kbytes in this upper memory space. The contents of Table 01h are listed in following table. Please refer SFF INF-8077i (Revision 4.5) for detailed information.

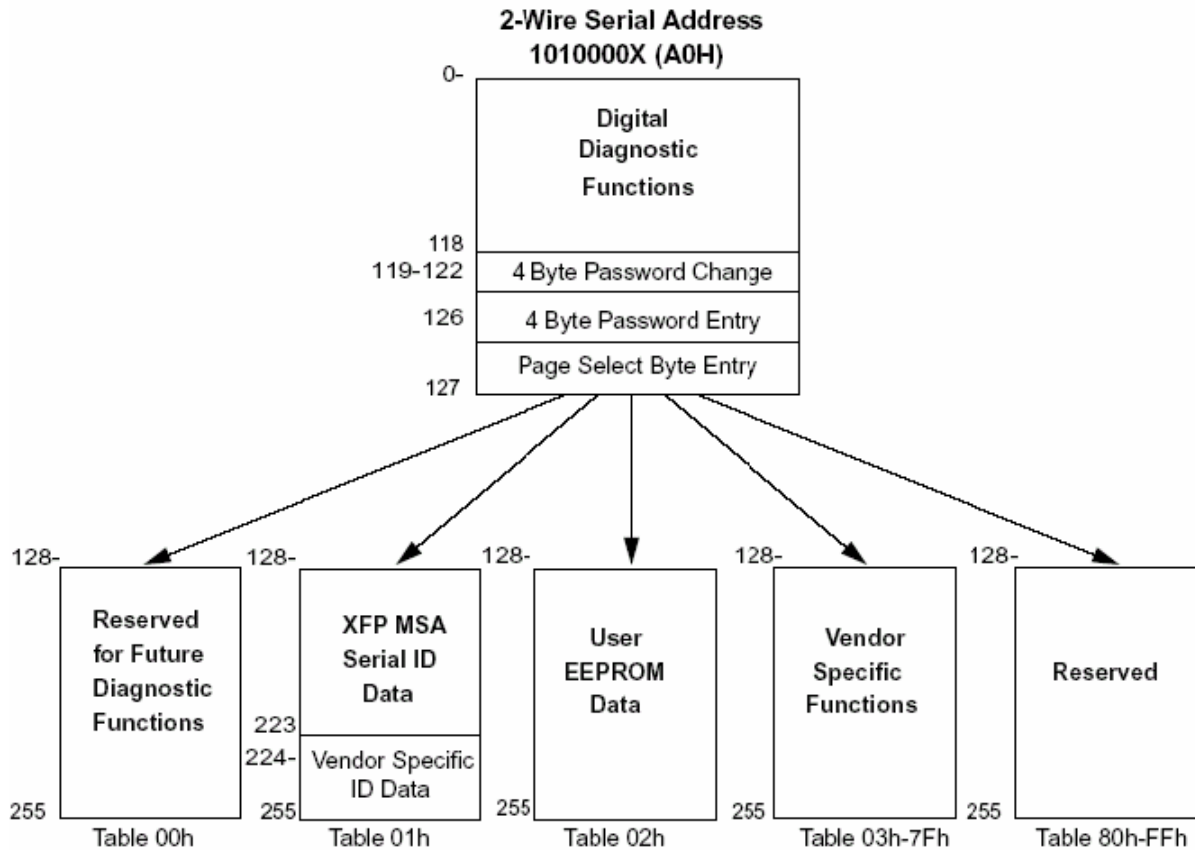


Monitor Specification:

Data Address	Parameter	Accuracy
96 ~ 97	Temperature	± 3°C
98 ~ 99	Reserved	
100~101	Tx Bias	±10%
102~103	Tx Power	±2dB
104~105	Rx Power	± 2dB
106~107	VCC3	± 3%

Recommended Host Board Power Supply Circuit

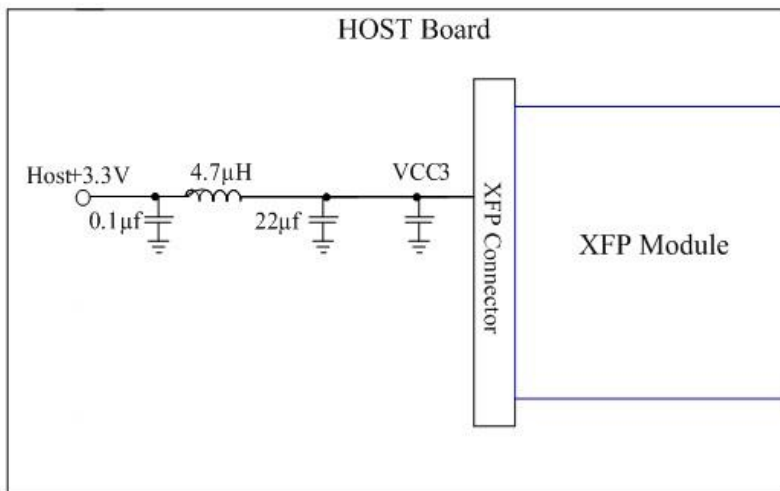


Recommended High-speed Interface Circuit

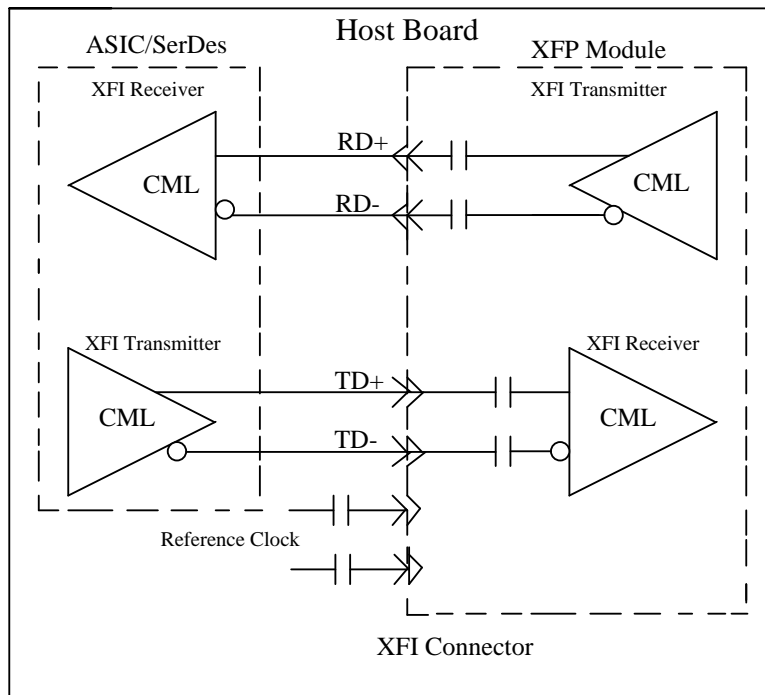

Mechanical Specifications

XFP transceivers are compliant with the dimensions defined by the XFP Multi-Sourcing Agreement (MSA).

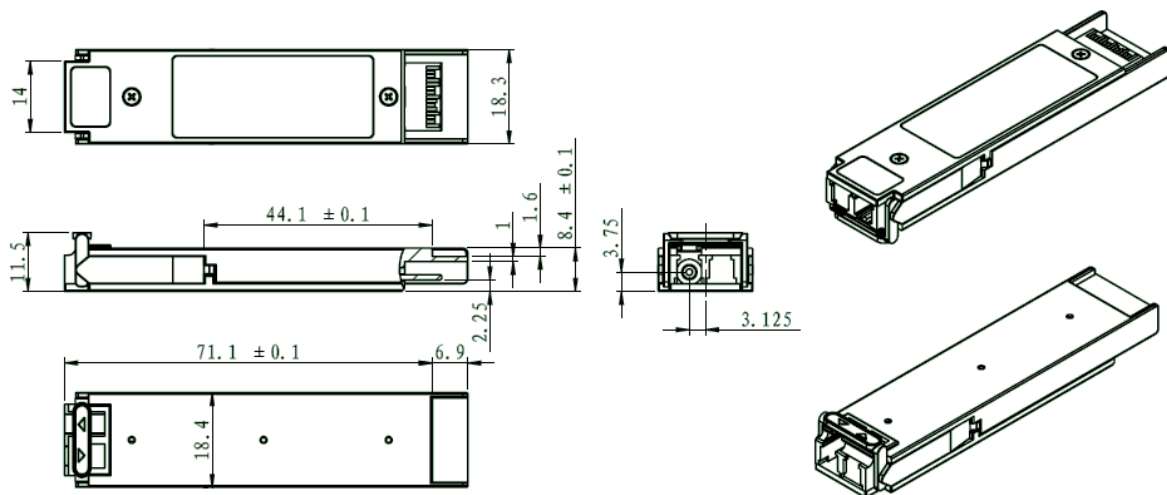

Eye Safety

This single-mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Contact

Data Controls Inc.

sales@dcj.jp www.dci.jp